

ZINCALUME® STEEL TECHNICAL GUIDE

For product identification and originality, please check the reverse side of the coil for the following branding text.

ZINCALUME (P) steel made by BlueScope 2018 07 APR 13 11



Certified to MS1196: 2004
Certificate No: PC00316



Certified to AS1397: 2001
Certificate No: PB030301



Eco-Friendly Coated Steel
SIRIM CERTIFIED 022: 2011
License No: EU00018

NS BlueScope Malaysia Sdn. Bhd. (223136-P)

T +603 3361 6888
F +603 3361 6889
E enquiries@bluescope.com
W www.bluescope.com.my

Customer Care Line : 1 300 88 6288

The information contained in this brochure is of a general nature only, and has not been prepared with your specific needs in mind. You should always obtain specialist advice to ensure that any materials, approaches and techniques referred to in this brochure meet your specific requirements.

NS BlueScope Malaysia makes no warranty as to the accuracy, completeness or reliability of any estimates, opinions or other information contained in this brochure, and to the maximum extent permitted by law, NS BlueScope Malaysia disclaims all liability and responsibility for any loss or damage, direct or indirect, which may be suffered by any person acting in reliance on anything contained in or omitted from this document.

ZINCALUME® is a registered trade mark of BlueScope Steel Limited.

BlueScope is a registered trade mark of BlueScope Steel Limited.

Copyright © 2017 NS BlueScope Malaysia Sdn. Bhd. All rights reserved. No part of this brochure may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without the written permission of NS BlueScope Malaysia Sdn. Bhd.

This brochure supersedes all previous version.

0917



Zincalume®


WHAT IS CORROSION?

Corrosion is caused by the deterioration of metal due to chemical reaction as a result of exposure to the environment (water and oxygen). It is also known as oxidation. Corrosion of metal results in the formation of rust or oxides in the corroded area.

ZN/AL COATING TECHNOLOGY (AZ150)

ZINCALUME® steel comprises coating composition of 43.5% zinc, 55.0% aluminium and 1.5% silicon. The minimum coating mass of 150 g/m² (AZ150) offers superior corrosion performance under varied conditions, when compared with other metallic coated steel. With additional proprietary surface treatment, ZINCALUME® steel also provides a combination of benefits just not available with generic Aluminum/Zinc (Al/Zn) coated alternatives.

CROSS SECTION OF ZINCALUME® STEEL

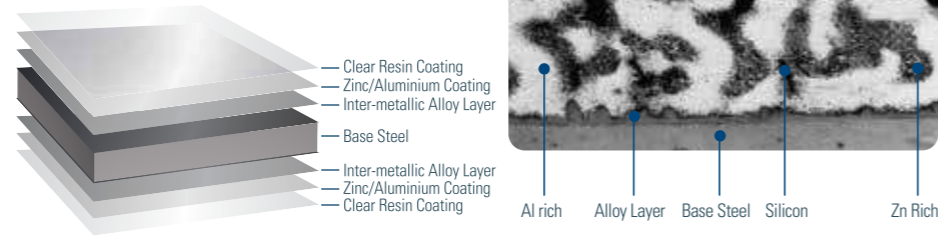

HOW DOES IT WORK?

Sacrificial protection is provided by an active metal (e.g. zinc), protecting a less active metal (e.g. steel). The more active metal corrodes in preference to the less active metal (figure A). ZINCALUME® steel exhibits a more complex coating structure consisting of both zinc-rich and aluminium-rich areas (figure B). The zinc-rich area provides excellent sacrificial protection, while the aluminium-rich area provides durable barrier protection. It is the combination of these two characteristics that make ZINCALUME® steel durable and effective against corrosion.



Figure A - Microscopic view of galvanized steel

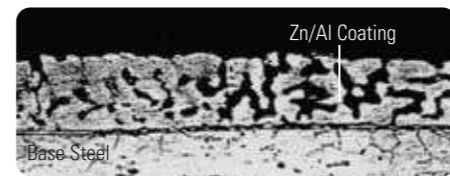


Figure B - Microscopic view of ZINCALUME® steel

HOW DOES IT PERFORM?

The pictured samples were exposed for the same period of time under a similar severe environment. The galvanized steel shows severe loss of coating and consequent red rusting of the steel substrate but the ZINCALUME® steel is still in good condition.



Bellambi Point site, Australia

Corrosion rates of galvanized steel and 55% Al-Zn alloy coated steel at Australian Atmosphere Exposure Test Sites.

Site	Galvanized Steel		55%Al-Zn Alloy Coated Steel	
	g/m ² /y	µm/y	g/m ² /y	µm/y
Severe Marine	140	9.8	16	2.2
Marine	18	1.3	4.0	0.54
Industrial/Marine	20	1.4	4.2	0.57
Rural	4	0.28	1.3	0.17

g/m² - two sided µm - one side

Green accreditation for the environment

Environmental sustainability is a continuous effort and commitment from all of us. We ensure our customers receive the highest standard in both quality and efficiency with the environment's best interest at heart. There is no better way to demonstrate our commitment than receiving green accreditation from renowned independent bodies.

Our coated steel products are accredited with Eco-Label by SIRIM QAS International, a member of the Global Ecolabelling Network (GEN).

The SIRIM Eco-Label certification identifies a product's overall environmental impact and the communication of its environmental information to consumers and businesses. Through this scheme, the product has undergone independent evaluation; and certified by SIRIM on its environment performance against criteria which include the composition of raw materials used, hazardous substances management and waste and energy management in the entire manufacturing operation cycle.

Key notes:

- Corrosion is dissolution of metal due to the surrounding environment.
- ZINCALUME® steel comprises a coating composition of 43.5% zinc, 55.0% aluminium and 1.5% silicon with a minimum coating mass of 150 g/m².
- For ZINCALUME® steel, the zinc rich area provides excellent sacrificial protection, while the aluminium rich area provides durable barrier protection.

Ten Facts of ZINCALUME® steel

- ZINCALUME® is the brand name of BlueScope's premium metallic coated steel product.
- BlueScope is the pioneer in introducing zinc/aluminium alloy-coated technology. ZINCALUME® steel now has more than 35 years of proven field performance around the world.
- ZINCALUME® steel has provided more than 10 million tonnes of roofing and wall cladding since 1976.
- In Malaysia, ZINCALUME® steel is only manufactured by NS BlueScope Malaysia, an ISO 9001 and ISO 140001 certified company.
- ZINCALUME® steel is guaranteed to achieve a material strength of 300MPa (G300) or 550MPa (G550) as specified.
- With a minimum coating mass of 150g/m² (AZ150) – proven by triple spot test, ZINCALUME® steel provides corrosion

resistance up to 4 times the life of galvanized steel with similar coating thickness.

- BlueScope's extensive research and development program bring continuous improvement to the performance of ZINCALUME® steel. With proprietary surface treatment, ZINCALUME® steel has greater resistance to weathering and surface marking.
- In assurance of highest product quality and performance, ZINCALUME® steel is SIRIM certified according to Australian Standard AS1397 and Malaysian Standard MS1196.
- ZINCALUME® steel is SIRIM Eco-Label (Coated Steel) certified to meet requirement of green rated building materials.
- ZINCALUME® steel is backed by a BlueScope warranty* for up to 25 years against perforation by corrosion.

*Terms and conditions apply

How does ZINCALUME® steel compare with other 55% Al/Zn steel?

Feature	ZINCALUME® steel	Other 55% Al/Zn steel
Certification SIRIM certified What it means 3rd party endorsed	✓	?
Mechanical Properties Yield Strength (G300/G550) What it means G550 = yield strength of minimum 550 N/mm ² G300 = yield strength of minimum 300 N/mm ²	✓	?
Corrosion Performance Minimum AZ150 coating class What it means Optimum 55% Al, 43.5% Zn, 1.5% Si composition AZ150 = minimum 150 g/m ² of Aluminium – Zinc coating	✓	?
Warranty Backed by a BlueScope warranty of up to 25 years* What it means Product quality, service and support you can rely on	✓	?
Branding Each sheet is branded on the reverse side to confirm its quality What it means It is easy to distinguish genuine ZINCALUME® steel from generic substitutes	✓	?
Product Appearance Spangle size is small, fine and consistent Indicate optimised Aluminium and Zinc coating combination What it means Distinctive appearance that is lustrous and shiny	✓	?
Darkening Passivated by BlueScope technology designed to maintain the material's lustre What it means ZINCALUME® steel will continue to look new for longer duration	✓	?

*Depends on the environment and the location of the building.

Disclaimer: Spangle variance from coil to coil is an inherent characteristic of metallic alloy coating process and will not affect the performance of the product. It is therefore not a cause for rejection