

## Prepainted - PP

### GENERAL DESCRIPTION

BlueScope ZACS Natural® prepainted steel is an economical but high quality thin-gauge roofing and wall cladding material, specifically designed to give special decorative finishes for retail segment. It has Aluminium/Zinc alloy protective coating that offer significantly better corrosion resistance and longer life expectancy than galvanized steel (GI), or prepainted galvanized steel (PPGI). To determine if warranties apply, please contact your nearest BlueScope sales office for advice.

### TYPICAL USES

Residential thin-gauge roofing and wall cladding, as well as awning which requires special decorative finishes for retail segment. For material selection advice, please contact your nearest BlueScope sales office.


### MALAYSIAN STANDARD

Paint Coating – MS2383 C2;

Substrate – MS1196

### PRODUCT INFORMATION

<b>PREFERRED SUBSTRATE</b>	55% Al/Zn G550S AZ90 steel (Aluminium/Zinc alloy-coated steel)
	55% Al/Zn G300S AZ90 steel (Aluminium/Zinc alloy-coated steel) (Refer Note 8)
<b>PRETREATMENT</b>	Corrosion resistant proprietary conversion coating
<b>FINISH COAT</b>	Custom formulated paint system. Nominal dry film thickness 13µm on the top or weather side.
<b>BACKING COAT</b>	Custom formulated Villa Backer. Nominal dry film thickness 5µm
<b>COLOUR</b>	A range of standard colours is available. Other specifically required colours may be available on request.

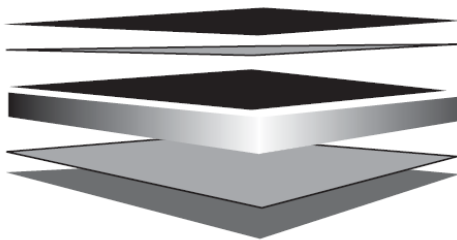

Finish Coat (Nominal 12µm) (Refer Note 4 & 5)  
Conversion Coating

55% Aluminium/Zinc Alloy Coated Steel Substrate AZ90  
Conversion Coating  
Backing Coat (Villa Backer, Nominal 5µm) (Refer Note 6)

### DIMENSIONAL CAPABILITIES\*

55% Al/Zn G550S AZ90 STEEL		55% Al/Zn G300S AZ90 STEEL	
PREFERRED BASE METAL THICKNESS, mm*	MAXIMUM WIDTH, mm	PREFERRED BASE METAL THICKNESS, mm*	MAXIMUM WIDTH, mm
0.30, 0.35	914	0.30, 0.35	914

#### Notes

\* These dimensions are a reflection of technical capability to produce. Any other sizes may be available on request.

The dimensional tolerances for thickness, width flatness and camber shall be in accordance with the requirements of AS/NZS1365.

Supply conditions may be subject to dimensional restrictions and is subject to BlueScope Sales and Marketing confirmation.

Slitting and shearing available on request from BlueScope Sales Offices. For requirements outside the standard product range please contact your local Sales Office.

### ATTRIBUTES TESTED DURING MANUFACTURE

PROPERTY	TEST & EVALUATION METHOD (S)	RESULTS
Specular Gloss (60°meter)	MS133: Part D5	Nominal 7 ± 3 units
Reverse Impact	MS2383 (Annex C)	≥ 10 joules
T-bend	MS2383 (Annex D)	Maximum 6T. Refer Note 7

NS BLUESCOPE (MALAYSIA) SDN. BHD. (223136-P)

(Formerly known as BlueScope Steel (Malaysia) Sdn. Bhd.)

Lot 1551, Jalan Bukit Kapar, 42200 Kapar, Selangor Darul Ehsan, Malaysia. Tel: +603-3361 6888 Fax: +603-3361 6889 Website: www.bluescope.com.my

BlueScope, BlueScope ZACS COOL® is a registered trademark of BlueScope Steel Limited.

Copyright © 2019 by NS BlueScope (Malaysia) Sdn. Bhd. All rights reserved.

Please ensure you have the current datasheet for this product as displayed at [www.bluescope.com.my](http://www.bluescope.com.my)

## Prepainted - PP

### PRODUCT ATTRIBUTES

PROPERTY	TEST & EVALUATION METHOD (S)	RESULTS
Scratch Resistance	MS133: Part E2	≥ 1000g

### IMPORTANT NOTES

1. All warranties for a product, if any, are subject to eligibility. Terms and conditions apply. Nothing in this document is intended by BlueScope to extend, modify or otherwise affect any stated product warranty. To find out more, please contact your nearest BlueScope sales office.
2. If it is intended to use BlueScope ZACS Natural® steel in an exterior application within 1km of salt marine locations, severe industrial or abnormally corrosive environments; in areas not washed by rain, or in applications where it will be wholly or partly buried in the ground, please contact your nearest BlueScope sales office for specialized advice. For selection of the most BlueScope ZACS Natural® steel product, please refer to Technical Bulletins TB1a, TB1b, CTB16, CTB21, and CTB22.
3. Customers should use product promptly (within 6 months) to avoid the possibility of storage related corrosion.
4. Finish Coat – the coating applied to the exposed surface of the prepainted coil which is expected to meet the Performance Requirements.
5. The product is supplied with a nominal 7 unit (60°) gloss Finish Coat.
6. Backing Coat – a thin coating applied to the reverse surface of the prepainted coil. It also gives additional durability to the reverse surface during the service life of the product, but for aesthetic reasons is not recommended for exposure to sunlight. Performance Requirements are generally not applicable to backing coats.
7. The minimum internal bend diameters for forming processes to achieve no paint cracking (visible using x 10 magnification) and to avoid paint adhesion issues are specified by the T-bend flexibility and T-bend adhesion results respectively – where 1T equals the Total Coated Thickness (TCT) in mm of the material. These results are based on testing at 20-25°C.
8. For most products, the metallurgical ageing process which is inherent in the paint stoving cycle will result in some loss of ductility compared with unpainted product. However, minimum strength levels designated by relevant standards will still be applicable.
9. Improper storage or use of non-approved roll-forming lubricants may cause brand transfer and paint blushing, and may adversely affect colour and long term durability. Product in coil or sheet pack form must be kept dry. If the coil or sheet pack becomes wet, it must be separated and dried (refer AS/NZS2728 Appendix L, and also Technical Bulletin TB7). Contact nearest BlueScope sales office on appropriate roll-forming lubricants.
10. Values quoted are for panels exposed in accordance with AS/NZS2728. Variations for in-situ performance may occur due complexity of building design and location.
11. BlueScope ZACS Natural® steel has good resistance to accidental spillage of solvents such as methylated spirits, white spirit, mineral turpentine, toluene, and trichloroethylene and dilute mineral acids and alkalis. However, all spillages should be immediately removed by water washing and drying.